

lisocore®

The sustainable High-Performance Board!

PYRUS PANELS

Explore the new lisocore® - Highlights!

lisocore® PURE NATURE



lisocore® with
real wood
cover layer

Now available in Oak and Larch
Thickness: 40,0 mm
Size: 2.500 x 1.200 mm



lisocore® with
veneered plywood
cover layer

Now available in Oak and Spruce
Thicknesses: 19,0 mm and 25,0 mm
Size: 2.500 x 1.700 mm

lisocore® digital printed!



Our in-house print shop will be happy to realize your ideas!
The high-performance board lisocore® or any other printing substrate serve as printing basis.

Idea: Sliding doors with decor HANAMI on our 19,0 mm lisocore® RECOAT



Our standard range

lisocore® with wood fibre cover layer		Thickness mm	Density kg/m ³	
lisocore® with HDF raw cover layer Size: 2.800 x 2.070 mm		15,0	390	
		19,0	330	
		25,0	315	
lisocore® with MDF raw cover layer Size: 2.800 x 2.070 mm		38,0	370	
		50,0	280	
		60,0	260	
NEW! Our melamine selection		Thickness mm	Density kg/m ³	
lisocore® RECOAT melamine-faced cover layer Size: 2.800 x 2.070 mm lisocore® RECOAT is ideal for the material-saving application of primer or lacquer!	 <p>Basic white K0101 / SM</p>	15,0	430	
		19,0	350	
		25,0	360	
		38,0	380	
		50,0	290	
		60,0	270	
All colours of our melamine selection:				
 <p>Brilliant White K8681 / SU</p>	 <p>Basic White K0101 / SM</p>	 <p>Grey K0112 / ST</p>	 <p>Anthracite K0162 / ST</p>	 <p>Nature Oak K3025 / MV</p>


... if a little less weight is requested

lisocore® with plywood cover layer	Thickness mm	Density kg/m ³
<p>lisocore® with plywood cover layers raw (Ilomba-Poplar-Ilomba) Appearance class I/I</p> <p>Size: 2.440 x 1.220 mm</p> <p>For extra light applications and optimal finish foil coating results</p>	 <p>15,0</p>	265

... in practical application

lisocore® as sliding-door panel	Thickness mm	Weight kg / Panel
<p>lisocore® with melamine-faced cover layer lisocore® RECOAT</p> <p>Size: 2.800 x 2.070 mm</p> <p>with Birch-Multiplex-Inlays (2070 x 95 mm) on both sides for all highly demanding fastening systems</p>	 <p>Basic white K0101 / SM</p> <p>40,0</p>	80

For all items from our standard range is valid:

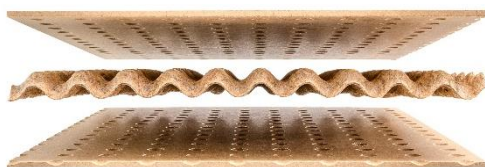

MOQ: 1 pallet
Delivery time: 2 – 3 weeks

lisocore®

The sustainable High-Performance Board!

PYRUS PANELS

We also manufacture lisocore® with individual cover layers and in different sizes! Thicknesses between 15,0 and 120,0 mm are feasible!

We would be happy to help you to define your lisocore®!

Please get in touch with your contact person or:

verkauf@pyrus-panels.com

+49 8061/34979-0



The mark of responsible forestry

NEW!
We produce lisocore®
with FSC®- and PEFC-Certification
order related!



lisocore®

The sustainable High-Performance Board!



Green Product Award
2020



SCHWEIGHOFER PRIZE
2009

Inno4wood
Mit Holz in die Zukunft

UMWELT INNOVATIONS PROGRAMM

Version 1/2021

Pyrus Panels GmbH, Carl-von-Ossietzky-Str. 17-21, 83043 Bad Aibling, Telefon +49 8061 34979-0, Fax +49 8061 34979-99

Geschäftsführer: Robert Vuga

Sitz der Gesellschaft: Bad Aibling, Registergericht Traunstein HRB 19867