














## Our standard range

lisocore® with wood fibre cover layer		Thickness mm	Density kg/m <sup>3</sup>
lisocore® with <b>HDF raw</b> cover layer Size: 2.800 x 2.070 mm 3.050 x 1.300 mm		16,0	375
		19,0	330
		25,0	315
lisocore® with <b>MDF raw</b> cover layer Size: 2.800 x 2.070 mm 3.050 x 1.300 mm		38,0	320
		50,0	240
		60,0	200


NEW! Our melamine selection		Thickness mm	Density kg/m <sup>3</sup>
<b>lisocore® RECOAT</b> with <b>melamine-faced</b> <b>cover layer</b> Size: 2.800 x 2.070 mm		16,0	510
		19,0	430
		25,0	345
		38,0	330
		50,0	255
		60,0	215

Front White  
0101 SM; PE

lisocore® RECOAT is ideal for the material-saving application of primer or lacquer!

					
Brilliant White 8681 SU	Front White 0101 SM; PE	Stone Grey 0112 PE	Light Vintage Oak 3025 SN	Graphite Grey 0162 PE	Anthracite 0164 PE
					
Gold Craft Oak K003 PW	Honey Castello Oak K358 PW	Amber Urban Oak K006 PW	Sand Barbera Oak K543 SN	Gold Baroque Oak K535 RW	Tobacco Franklin Walnut K547 RW


... if a little less weight is requested

lisocore® ultra-light	Thickness mm	Density kg/m <sup>3</sup>
<p>lisocore® with <b>plywood cover layers raw</b></p> <p>Appearance class I/I</p> <p>Size: 2.440 x 1.220 mm</p> <p>For extra light applications and optimal finish foil coating results</p>	 <p>15,0</p>	<p>270</p>

... in practical application

lisocore® as sliding-door panel	Thickness mm	Density kg / Panel
<p>lisocore® with <b>melamine-faced cover layer</b> lisocore® RECOAT</p> <p>Size: 2.800 x 2.070 mm</p> <p>with veneer plywood inlays firmly glued at the top, removable at the bottom for all highly demanding fastening systems</p>	 <p>Front White 0101 SM</p> <p>40,0</p>	<p>80</p>

For all items from our standard range is valid:

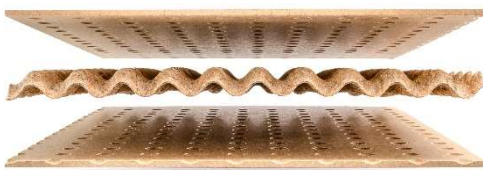

MOQ: 1 pallet  
Delivery time: 2 - 3 weeks

... or contact your distributor!