PYRUS PANELS

Product Information
lisocore® Sliding door panel

Panel composition:

Panel thickness:	40,0 mm
Size:	2.800 x 2.070 mm
Inlays:	laminated veneer lumber top: 90,0 x 2.070 mm bottom: 45,0 x 2.070 mm NEW: bottom inlay removable!
Weight:	80 kg / Panel ≙ 13,8 kg/m² (at above mentioned size)
Cover layer:	8,0 mm MDF
Coating:	lisocore® RECOAT Melamine Front White 0101 SM

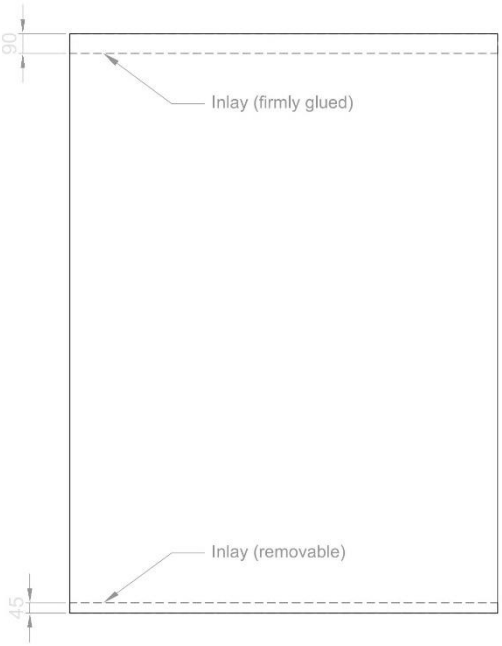

The matt lisocore® RECOAT surface is ideally suited for the material-saving application of a primer or varnish – after just one sanding process for cleaning!

The patented structure guarantees a very high bending strength as well as low self-weight!

NEW: bottom inlay removable!

Laminated veneer lumber inlays on both sides are the basis for all fastening systems designed for highest demands.

Pyrus Panels | Icom Advanced Materials GmbH
Betriebsstätte Bad Aibling
Carl-von-Ossietzky-Str. 17-21
83043 Bad Aibling

Handelsregister AG Eschwege HRB 3711
Steuernummer 026/236/00342
Umsatzsteuer ID Nr. DE451430360
Geschäftsführer: Ales Kopal

Bankverbindung:
Commerzbank AG
IBAN: DE04 5224 0006 0171 0516 00
BIC: COBADEFFXXX

PYRUS PANELS

Product Information
lisocore® Sliding door panel

Application example:

Sliding doors for wardrobes

Data single sliding door:

- Cutted size: 2500 x 1300 x 40 mm
- Weight: 48 kg
- Without edge bending or handle-strip

When used as a wardrobe sliding door in the shown installation situation, there is a flection of < 4 mm over the length of the door after a period of 30 days.

Installation situation:

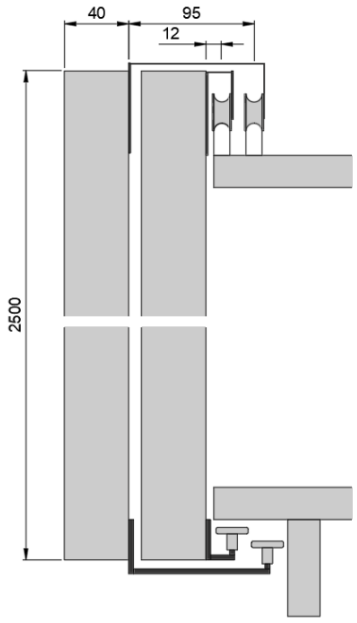

Processing video sliding door panel

Please follow the QR-code: Building a sliding door from lisocore®!

We are very happy to assist you with any questions!

Please get in touch with your contact person or:

verkauf@pyrus-panels.com
+49 8061/34979-0

lisocore®

The sustainable High-Performance Board!